




DIN 11024

Double Ring Beta Split Pins/R-Clips

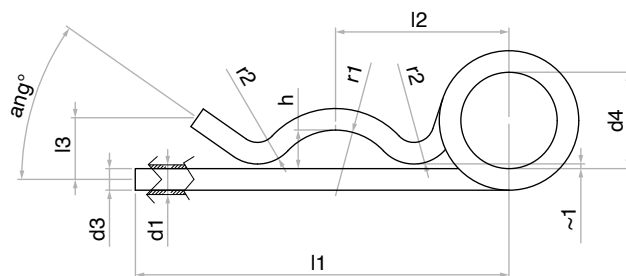

Dimensions	Materials	Surface treatments	Packaging
DIN 11024	Spring carbon steel	Zinc plating 3 to 12 MY (white, yellow, black, iridescent)	Carton boxes
Personalized drawing	Stainless steel A2 (AISI 304) 	Zinc flake coating	Bulk
	Stainless steel A4 (AISI 316) 	Zinc-Nickel plating	Sacks

Dimensions in mm

Through hole diameter d1	Real wire diameter d3	d4	l1	l2	l3	h	r1	r2	ang°	Standard packaging qty.
H13	± 0,02	± 0,50	± 1,50	± 2,00	± 1,50	± 1,00	~	~	± 10°	
2,5	2,25	20,00	42,00	24,00	5,50	2,50	5,60	4,00	35°	25
3,2	2,80	20,00	48,00	26,00	7,00	3,00	7,00	5,00	35°	20
4	3,60	20,00	64,00	32,00	10,00	4,50	10,00	6,50	35°	20
5	4,50	25,00	80,00	39,00	12,50	7,00	13,00	8,00	35°	10
6,3	5,60	25,00	97,00	45,00	16,00	9,00	17,00	10,00	35°	10
7	6,30	30,00	125,00	56,00	21,00	12,50	22,50	11,50	35°	10
8	7,00	30,00	150,00	63,00	25,50	17,50	28,00	12,50	35°	10